

Function:

A finger-like fan spray which is ideal as a peripheral adornment to vertical central displays in medium-sized installations. Excellent in wall mounted applications. Effective as an evaporative spray in pools and ponds or in water cooling. Large cleanout port.
Not water level dependent.

Specification


Construction shall be cast bronze, brass and stainless steel.

Options

ASU100 - 15° swivel connection for directional alignment of nozzle

Note

- 1. Requires fine screening at pump (see performance chart).

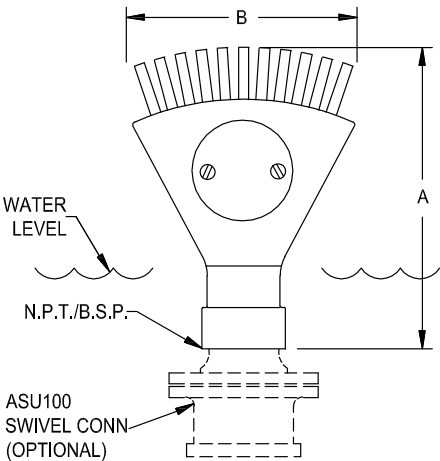

Dimensions

Performance

Part no.	suction strainer openings required	a dim.	b dim.	inlet (npt) (bsp)	throw	spread	height	gpm	head
NGF-100	.125"	7"	6"	1"	2'	58"	18"	13	4'
					3'	86"	28"	17	5'
					4'	102"	35"	19	6'
					5'	120"	48"	23	8'
					6'	156"	52"	25	10'