

Function


A hollow column of clear water that appears to be an overflowing glass tube. Cresting water creates minimum splash. Spectacular when illuminated.
Not water level dependent

Specifications

Construction shall be cast iron bronze, extruded machined brass, copper and stainless steel. Complete with integral swivel adjustment.

Note

- For optimum effect
- 1. Requires non-turbulent water supply.
 - 2. Requires fine screening at pump (see performance chart).

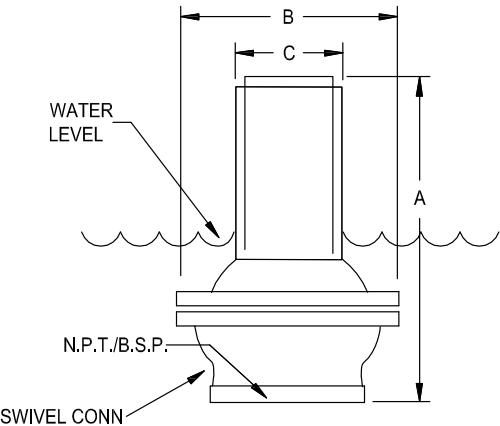

Dimensions

Performance

Part no.	suction strainer openings required	a dim.	b dim.	c dim.	inlet (npt) (bsp)	spray height	1'	2'	3'	4'	5'	8'	10'
NHC-100	.060"	5 1/2"	2 1/2"	1 1/8"	1"	gpm head spread	11 3' 5"	16 4' 9"	20 7' 12"	23 8' 12"	37 10' 14"		
NHC-150	.090"	7"	3 1/4"	1 5/8"	1 1/2"	gpm head spread	22 3' 9"	31 4' 9"	37 6' 14"	43 7' 16"	47 9' 20"	60 13' 27"	67 17' 38"
NHC-200	.125"	7 1/4"	4 1/4"	2 1/8"	2"	gpm head spread	29 2' 9"	38 4' 13"	46 5' 16"	53 7' 18"	58 8' 27"	74 13' 48"	81 15' 48"
NHC-300	.250"	9"	6"	3"	3"	gpm head spread		75 3' 18"	91 5' 24"	108 6' 30"	124 6' 30"	128 10' 42"	182 13' 56"