

Function

A circular pattern of individual sprays with an outstanding visual effect. The spray appears lacy by day and sparkles when illuminated by night. Adjustable nozzles permit infall, straight or outfall pattern.
Not water level dependent.

Specification

Construction shall be extruded PVC with individually adjustable brass nozzles with inlet fittings, plugs and four copper legs as required.

Options



Red brass ring - Contact Crystal Fountains Inc.
WMF082 - Nozzle adjustor key

Notes

- 1. Requires fine screening at pump (see performance chart)
- 2. Contact Crystal Fountains Inc. for customized rings and bars (all shapes and sizes)



WMF082

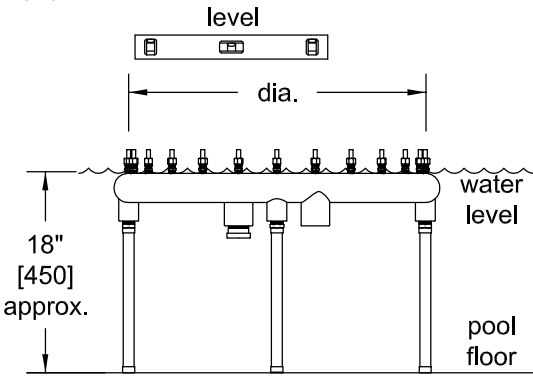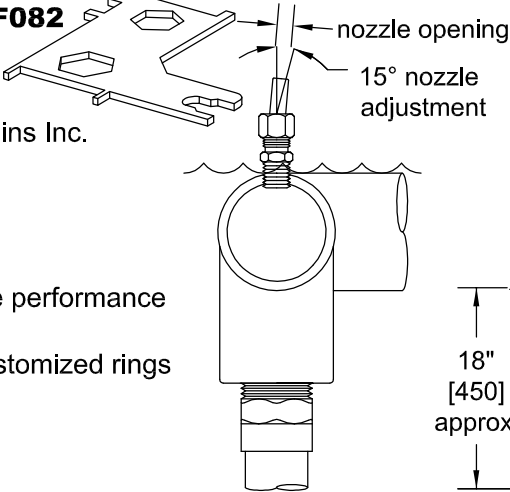

Performance

Part no.		dia.	inlet (s) n.p.t. / b.s.p.	no. of jets	pipe dia.	spray height	2'	3'	4'	5'	6'	8'	10'	12'	14'
						head	6'	8'	10'	12'	15'	20'	25'	30'	35'
fine spray 1/8" nozzles (opening = .125") suction strainer openings required 0.065"	NSR122	1'	1"	16	1"	US gpm	7	8	10						
	NSR222	2'	1" x 2	22	1¼"		9	11	13						
	NSR322	3'	1¼" x 2	47	1¼"		19	24	28	33	38				
	NSR422	4'	1¼" x 2	50	1½"		20	25	30	35	40				
	NSR522	5'	1¼" x 2	56	1½"		23	28	34	40	45	56			
	NSR622	6'	1¼" x 3	75	2"		30	38	45	53	60	75			
	NSR822	8'	1¼" x 4	113	2"		45	57	68	79	90	113	125		
heavier spray 1/4" nozzles (opening = .187") suction strainer openings required 0.090"	NSR223	2'	1¼"	24	2"	US gpm	25	35	48	52	55				
	NSR323	3'	1¼" x 2	36	2"		30	50	72	78	86				
	NSR423	4'	1½" x 2	48	2"		45	70	96	106	120				
	NSR523	5'	1½" x 2	60	2"		53	84	114	122	130	146			
	NSR623	6'	1½" x 3	72	2"		60	96	132	144	162	174			
	NSR823	8'	1½" x 4	84	2½"		80	124	168	184	200	226	244	260	278