

Function

A graceful spray effect with adjustable nozzles to allow adaptability to site requirements. Ideal for small and medium sized displays.
Not water level dependent.

Specification


Construction shall be cast bronze, machined brass and copper with adjustable nozzles and removable cap for easy cleaning.

Options

ASU125 - 15° swivel connection for directional alignment of nozzle

Note

For optimum effect
1. Requires fine screening at pump (see performance chart)

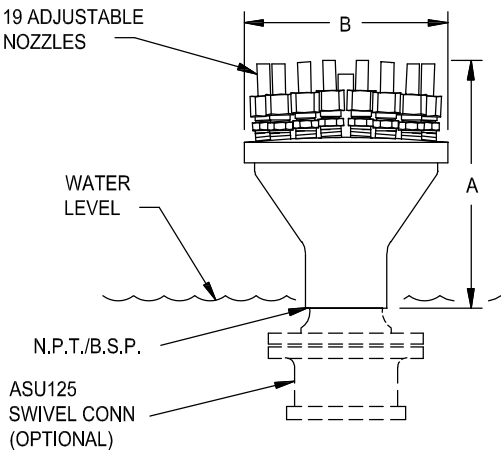

Dimensions

Performance

Part no.	suction strainer openings required	a dim.	b dim.	inlet (npt) (bsp)	spray height	4'	5'	6'	7'	8'	9'	10'	12'
NWA-125	.125"	5 3/4"	5"	1 1/4"	gpm head spread*	21 6' 64"	22 7' 72"	26 9' 100"	28 10' 108"	31 11' 128"	32 13' 130"	35 16' 144"	38 19' 192"

* Spread will vary according to adjustable nozzle setting.