

Function

A graceful effect that can be used as a centrepiece for small to large fountains. Individual nozzles produce jewel-like effervescent streams when illuminated at night. **Not water level dependent.**

Specification

Construction shall be cast bronze and machined bronze and brass. Top shall be removable for easy cleaning.

Options

ASU series - 15° swivel connection for directional alignment of nozzle.

Note


Requires fine screening at pump for optimum effect (suction strainer openings 0.125")



NSJ100



NSJ200 THRU 600

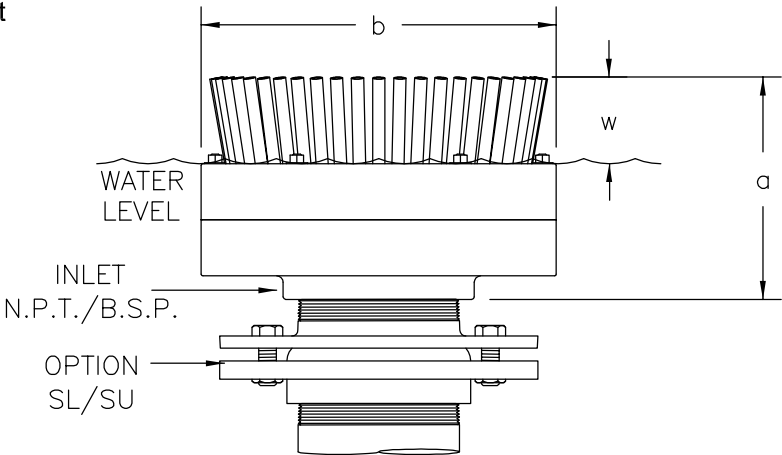

Performance

PART no.	a	b	w min.	no. of jets	inlet n.p.t. or b.s.p.	spray height	3'	5'	8'	10'	15'
NSJ100	5"	4½"	2"	24	1¼"	US gpm head spread	42 4' 5'	53 7' 8'	62 11' 12'		
NSJ200	5"	7"	2"	36	2"	US gpm head spread	62 4' 5'	80 7' 8'	93 11' 12'		
NSJ300	5¼"	9¾"	2"	48	3"	US gpm head spread	53 5' 4'	73 8' 6'	100 12' 8'	111 14' 11'	
NSJ400	7¾"	11½"	4"	36	4"	US gpm head spread	165 5' 7'	216 8' 12'	270 12' 13'	314 14' 15'	429 20' 22'
NSJ600	9½"	14¼"	4"	48	6"	US gpm head spread	153 5' 6'	279 8' 8'	330 12' 13'	419 14' 15'	570 20' 22'

